PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

Name of the work:- Estimate for the work of providing & laying new 230mm dia SW pipeline SW line at Baraja slum Veerabhadra nagar coming under Errimagam S/S- of AEE-SW3 Sub Division.

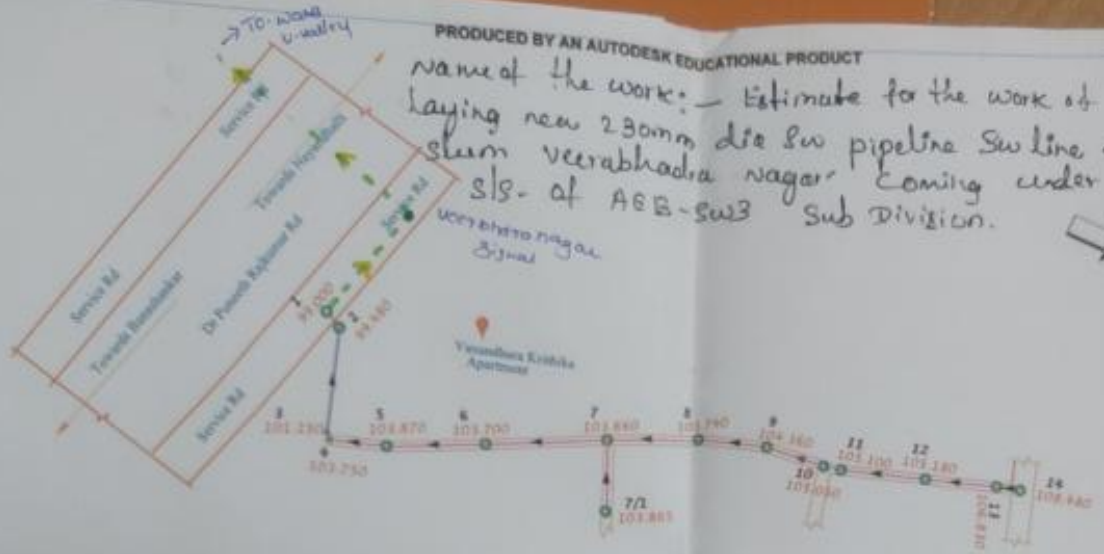

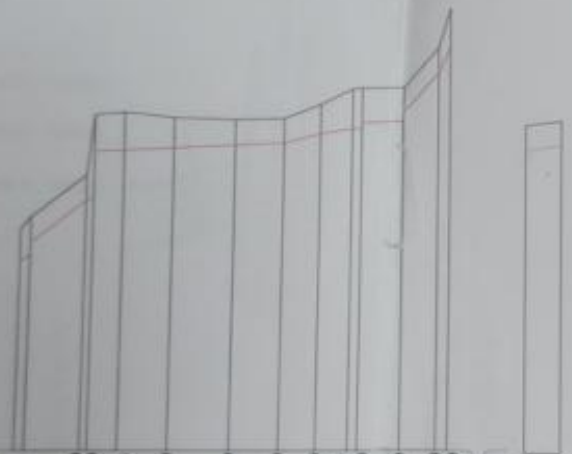

DATUM-90.000																
GROUND LEVEL	99.000	99.480	101.250	103.750	103.870	103.700	103.660	103.740	104.360	105.050	105.100	105.180	106.830	108.480	103.660	103.865
INVERT LEVEL	97.520	97.980	100.650	100.950	102.250	102.320	102.450	102.610	102.740	103.160	103.350	103.450	103.700	103.780	104.180	105.830	106.960	102.610	102.865
DEPTH OF CUT	1.50	1.50	1.00	1.00	1.50	1.55	1.25	1.05	1.00	1.20	1.70	1.65	1.45	1.40	1.00	1.00	1.50	1.05	1.00
CHAINAGE	0.00	4.00	22.00	3.00	12.00	20.00	25.00	20.00	15.00	13.00	4.00	18.00	15.00	5.00	0.00	15.00
CUMULATIVE CHAINAGE	0.00	4.00	26.00	29.00	41.00	61.00	86.00	106.00	121.00	134.00	138.00	156.00	171.00	176.00	0.00	15.00
STATION	1	2	3	4	5	6	7	8	9	10	11	12	13	14	7	7/1

LONGITUDINAL SECTION

Note :All dimensions are in mm
Scale- Plan 1:100
L/S. H- 1:2000 & V- 1:20

INDEX
ROAD
230MM SW LINE
EX LINE 300mm R.C.C.
FLOW DIRECTION
DRAIN
MANHOLES

AEE SW-3

E.E.(SW)-1

PRODUCED BY AN AUTODESK EDUCATIONAL PRODUCT

ESTIMATE FOR THE WORK OF PROVIDING AND LAYING NEW 230MM DIA SW PIPE AT BANJARA SLUM VEERABHADRA NAGAR COMING UNDER GIRINAGAR S/S OF AEESW-3 SUB DIV.

DATUM-90.000

GROUND LEVEL	100.00	100.470	100.565
INVERT LEVEL	98.600	99.270	99.565
DEPTH OF CUT	1.40	1.20	1.00
CHAINAGE	0.00	25.00	25.00
CUMULATIVE CHAINAGE	0.00	25.00	50.00
STATION	NMH1	NMH2	NMH3

LONGITUDIONAL SECTION

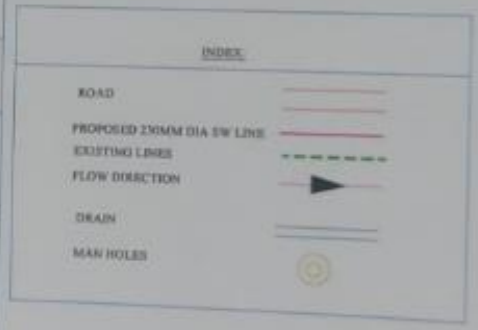

AE(GN)

AEE-3

Assistant Executive Engineer
o f Water Supply & Sanitary Sub-Division (S W
B W SSB. M.N.K Park, Basavanagudi
BANGALORE 560 004

EESW-1

Estimate for the Work of providing & laying 230mm dia SW pipeline SW line at Banjara Slum Veerabhadra Nagar coming under Girinagar S/s of AEE-SW3 Sub Division

AE(GN)

AEE(SW-3)

AEE SW-3

EE(SW)-1

Estimate for the Work of providing & laying 230mm dia SW pipeline SW line at Banjara Slum Veerabhadra Nagar coming under Girinagar S/s of AEE-SW3 Sub Division